



Thank you for purchasing a TeleSwivel® Static accessory channel hitch - the fastest, easiest, and safest way to connect a trailer to a tow vehicle!

Your TeleSwivel® is designed and built to the highest standards to provide years of trouble-free towing.

TeleSwivel® Static accessory channel



Owner's Manual for

TeleSwivel® Static Accessory Channel



**MAXIMUM GROSS TRAILER
WEIGHT: 10,000 LBS.**

**MAXIMUM TONGUE WEIGHT:
1,000 LBS.**

DO NOT EXCEED THE CAPACITY OF THIS
HITCH OR THE VEHICLE TOW RATING AS
SPECIFIED IN YOUR VEHICLE OWNER'S
MANUAL

This tow-bar complies with the requirements of
the Federal Motor Carrier Safety Administration

Manufactured by TeleSwivel, LLC.

The TeleSwivel® Static accessory channel hitches are backed by a limited 2-year warranty. For full details about the warranty please visit teleswivel.com or email warranty@teleswivel.com.

888-TEL-SWIV (888-835-7948)

 teleswivel.com

NOTE: For additional accessories (dual-ball, clevis mount, and ball-pintle combos), see www.teleswivel.com




Safety Guidelines

- WARNING:** Do not exceed the towing capacity of your tow vehicle. Check the owner's manual for your vehicle for the manufacturer's recommendations.
- WARNING:** Never use the TeleSwivel® hitching system without all three locking pins securely inserted and clipped in place. Failure to do so could result in serious injury or death if the trailer becomes disconnected from the hitch system.
- WARNING:** Do not exceed the tongue weight limits for your trailer or hitch. Always load your trailer properly.
- WARNING:** Do not tow with the TeleSwivel® in the extended position to avoid damage to the TeleSwivel® probe.
- Use wheel chocks to keep your trailer in place when connecting tow vehicle.
- Connect safety chains whenever you tow.
- Always make the electrical connection for trailer lights (and brakes, if your trailer is so equipped).





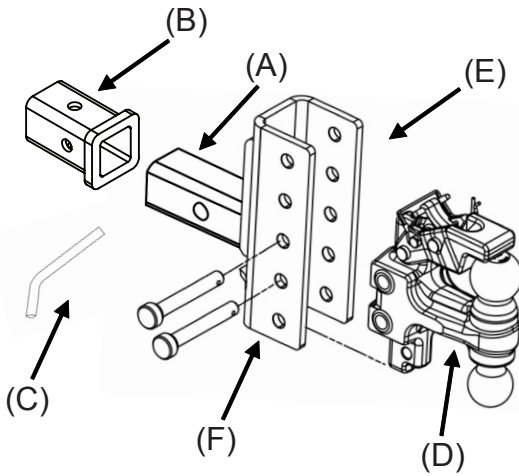


Installation



- Insert adapter arm (ref A) into your 2" receiver (ref B).
- Secure adapter arm in receiver with hitch locking pin (ref C)
- Place the selected hitch accessory (ref D) into the channel (ref E) at the appropriate height setting (Dual-ball pintle accessory is shown). Secure the accessory in the channel with the pins (ref F) provided. **Ensure that the pins are secured with the locking clips before towing.**



Additional Hitch Accessories

Accessory	Dual-Ball  APO-1770	DB Pintle Cap  APO-1374	2" Ball/Pintle  APO-1772	2 ⁵ / ₁₆ " Ball/Pintle  APO-1776	Clevis  APO-1771
GTW/Tongue Wt	10,000/1,000 or 14,000/1,400 lbs	10,000/1,000 or 14,000/1,400 lbs	10,000/1,000 lbs	13,000/1,300 lbs	14,000/1,400 lbs



Service & Repair

If you need service or replacement parts, please contact us:

Web: teleswivel.com

E-mail: info@teleswivel.com

Phone: (888) TEL-SWIV