




Locked



Extended

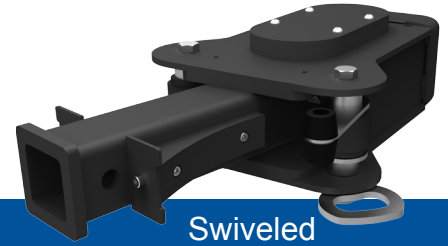

Swiveled

The TeleSwivel® hitch receivers come with or without the frame mounting crossbars, and adapt to medium and heavy-duty truck frames. 2 & 2.5" receiver boxes accept a wide range of traditional hitch accessories. Patent pending.



Operation is as simple as 1, 2, 3, Tow! 1. Get the truck within range. 2. Telescope and swivel the hitch into position. 3. Connect and then back up to lock into position. Tow!

## TeleSwivel® 400

- Rated up to 15,000 lbs. GTW
- 1,500 lb tongue weight
- Extends out 6 inches
- Swivels 5 inches to each side

## TeleSwivel® 600

- Rated up to 25,000 lbs. GTW
- 2,000 lb tongue weight
- Extends out 10 inches
- Swivels 8 inches to each side

## Contact Us

**Dave Woolf** - Tel: 919-623-2031  
Email: [dwoolf@teleswivel.com](mailto:dwoolf@teleswivel.com)

**Bob Lee** - Tel: 703-945-8431  
Email: [blee@teleswivel.com](mailto:blee@teleswivel.com)



*The fastest, easiest, safest way to connect a trailer. Ever.*

[www.teleswivel.com](http://www.teleswivel.com)

P.O. Box 52613, Durham, NC 27560